


TRAFFICPATTERNS XD
Thermoplastic panel, \geq 150 mils thickness

Finished post print depth
approximately 3/8".
Pattern as per specification

ASPHALT PAVEMENT
(Thickness as required. 2" min. typical
for overlay/resurfacing)

BASE
Compacted granular material. Depth as
required by local conditions and traffic
levels (min. 6")

SUBGRADE
In-situ firm to hard soil. Remove soft areas
and replace with well graded, compacted
gravel

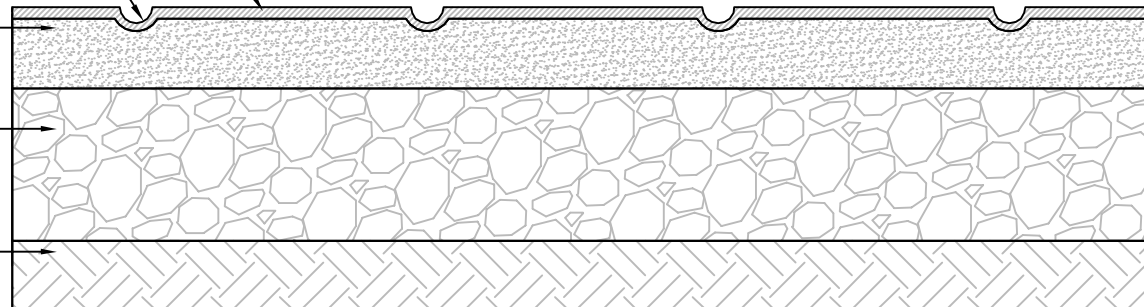

TYPICAL PAVEMENT WITH TRAFFICPATTERNS XD™ CROSS-SECTION DETAIL

Flint
TRADING INC.®

Flint Trading Inc.
336-475-6600 | www.flintrading.com