


TRAFFICPATTERNS XD  
Thermoplastic panel,  $\geq$  150 mils thickness

Finished post print depth  
approximately 3/8".  
Pattern as per specification

ASPHALT PAVEMENT  
(Thickness as required. 2" min. typical  
for overlay/resurfacing)

BASE  
Compacted granular material. Depth as  
required by local conditions and traffic  
levels (min. 6" )

SUBGRADE  
In-situ firm to hard soil. Remove soft areas  
and replace with well graded, compacted  
gravel

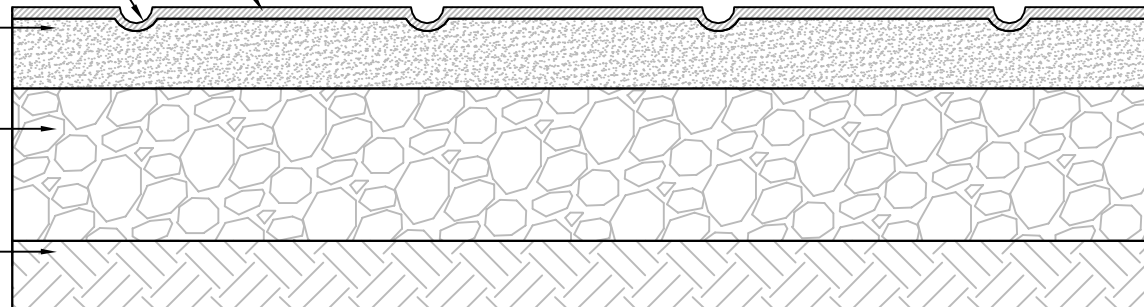

## TYPICAL PAVEMENT WITH TRAFFICPATTERNS XD™ CROSS-SECTION DETAIL

For sales & support in Canada contact [HUBSS.com](http://HUBSS.com)



HUB Surface Systems, Inc.  
604-309-8212 | [www.hubss.com](http://www.hubss.com)